


Non-return Valves.




Our Non-Return Valve is a simple and effective way to eliminate flood risk from backflow through drainage channels.

Features:

- Rigid uPVC injection molded body
- M&F fitting (rubber ring socket inlet, spigot outlet)
- Handel to allow valve to locked in open or close position
- Opening top inspection cover
- Removable parts for servicing



NORMAL WORKING SITUATION



EFFECTIVE ANTI-FLOODING

INSPECTION CHAMBER

Internal profile specially designed to provide uninterrupted flow (no reduced crossed flow section). Full access for pipe cleaning or rodding.

PLASTIC FLAP


Rigid uPVC injection moulded. Completely removable for servicing.

FLAP GASKET

Twin-lip profile to ensure optimal water tightness.

INTERNAL SHAPE

Built-in waterfall. No reduced crossed flow section.

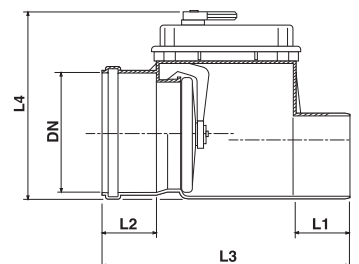

100mm, 150mm

| DN | L1 | L2 | L3 | L4 | CODE |
|-----|----|----|-----|-----|--------|
| 110 | 70 | 60 | 307 | 230 | NR.100 |
| 160 | 80 | 74 | 342 | 255 | NR.150 |

FREEPHONE **0508 AQUAFIT** (0508 278 234)

sales@aquafit.co.nz

aquafit.co.nz



AQUA-FIT
FOR PIPES AND FITTINGS